
Mineral wool - 25 mm

Installation method for 3D panels using KNAUF CD profiles and through hole / countersink.



Bent, glued plywood 3D panel - 608×608×45 mm

Through screw

U-shaped bracket


KNAUF CD 60/27 channel

Bent, glued plywood 3D panel - 608×608×45 mm

Groove - between panels 10 mm

Bent, glued plywood 3D panel – 608×608×45 mm

Through screw

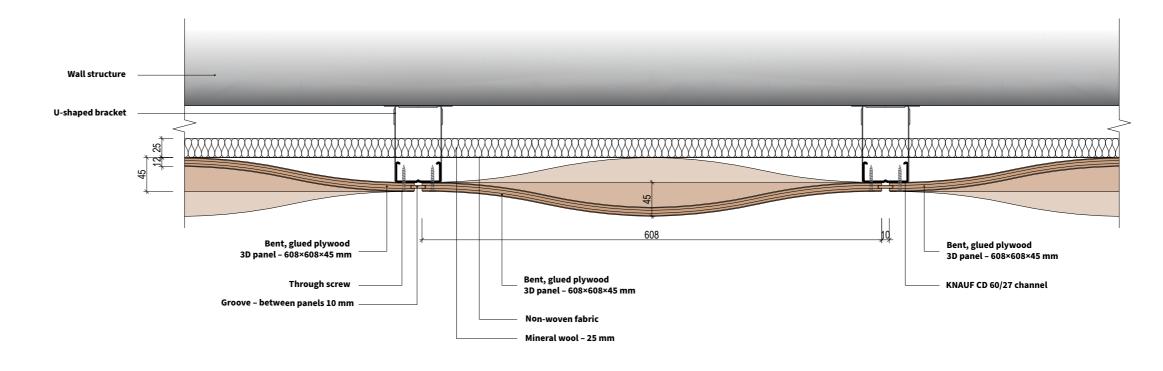

Axonometry of the acoustic panel system

